

Description

Local Area Network Cable

Cat. 5e F/UTP 4x2xAWG24 LSZH


Coaxial Cables

CAVEL®

since 1968

Data Sheet

LAN_541ZH

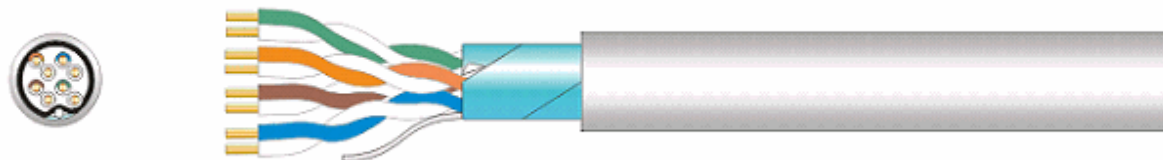

0,51	1,00	6,00
(Cu)	(PE)	(LSZH)

Construction data

4x2xAWG24 foil screened pairs of bare copper wires	(Cu)	0,51	mm
Insulation of solid Polyethylene	(PE)	1,00	mm

Composition	Sheath Colour	Lay length of pairs [mm]
	white/green - green	14,20
	white/orange - orange	18,00
	white/brown - brown	20,40
	white/blu - blu	13,00

Alluminio/Polyester tape spirally wound	(Al/Pet)	23 x	30/19	mm/μm
Drain wire of tinned copper	(CuSn)		0,40	mm
Outer sheath of Thermoplastic material - grey (RAL 7001) - halogen-free, flame retardant and UV-resistant	(LSZH)			6,00 mm

Printed each meter by blue ink-jet :

CAVEL LAN 541 ZH MADE IN ITALY ss/aa F/UTP 4x2xAWG24 - CATEGORY 5E ISO-IEC 11801 EN50173
CEI-UNEL 36762 C-4 (U0 =400V) - m

(ss=week , aaaa=year) (m=meter marking)

Electrical data

Characteristic impedance	1 - 100 MHz	100 ± 15	Ohm
Capacitance of Twisted Pair (@800Hz)		48	pF/m
Velocity Ratio		67 %	
Conductor resistance @ 20°C		95	Ohm/km
Loop resistance		190	Ohm/km
Insulation resistance		> 2.000	MOhm x km
Test voltage (DC, 1 min)		1	kV
Coupling Attenuation	30 - 100 MHz	> 45 dB	
Screening Attenuation (SA)			Transfer impedance
30 - 100 MHz	> 40 dB	up to	1 MHz < 25 mOhm/m
	---	up to	10 MHz < 8 mOhm/m
	---	up to	30 MHz < 10 mOhm/m

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date

03/10/2013

Responsible

Giuseppe Guastella

Description

Local Area Network Cable

Cat. 5e F/UTP 4x2xAWG24 LSZH

Coaxial Cables

CAVEL[®]

since 1968

Data Sheet

LAN_541ZH

Frequency [MHz]	Attenuation [dB/100m]	SRL [dB]	NEXT [dB/100m]	ACR [dB]	FEXT [dB]
1	1,90	20,00	71,00	69,10	80,00
10	6,00	25,00	56,00	50,00	62,00
20	8,50	25,00	51,00	42,50	58,00
31,2	10,70	24,00	49,00	38,30	56,00
62,5	15,70	22,00	44,00	28,30	50,00
100	19,80	20,00	41,00	21,20	48,00
155,5	24,20		38,00	13,80	
200	27,50		36,00	8,50	
250	29,20		35,00	5,80	
300	32,00		34,00	2,00	

Mechanical data

Weight of copper conductors	15,72	kg/km		
Total weight of cable	37,16	kg/km		
Minimum bending radius (installation/operation)	50/25	mm		
Maximum pulling strength during the installation	100	N		
Working temperature	-20 / +60	°C		
Lay out temperature	0 / +50	°C		
Fire Load	477	MJ/km	133	kWh/km

Standards

IEC 60332-1
 EIA-TIA 568B.2
 ISO/IEC 11801; IEC 61156-5
 EN50173; EN50288-2-1

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date

03/10/2013

Responsible

Giuseppe Guastella